


METALTECH CARRIES ALL SCAFFOLDING FRAME TYPES

We offer every scaffolding frame type available on the market. Our mission is to support all professionals in the scaffolding industry by delivering the safest solutions, designed to integrate with your existing inventory.

Exterior scaffolding provides a safe and efficient access solution for all construction and renovation projects.

For small or large projects, it is easy to install and facilitates effective work.

All frames follow ANSI and OSHA safety standards

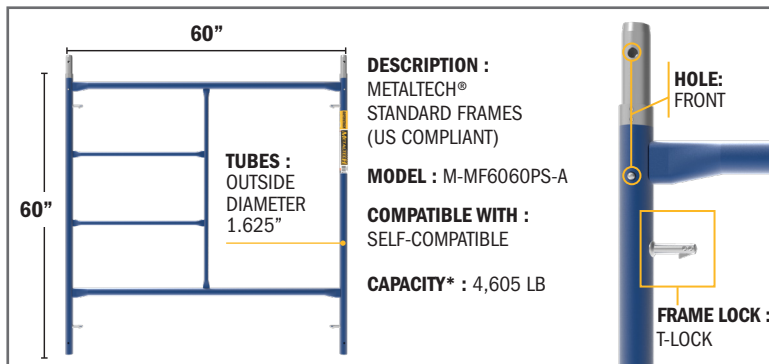

DESCRIPTION :
METALTECH®
STANDARD FRAMES
(US COMPLIANT)

MODEL : M-MF6060PS-A


COMPATIBLE WITH :
SELF-COMPATIBLE

CAPACITY* : 4,605 LB

TUBES :
OUTSIDE
DIAMETER
1.625"

HOLE:
FRONT

FRAME LOCK :
T-LOCK

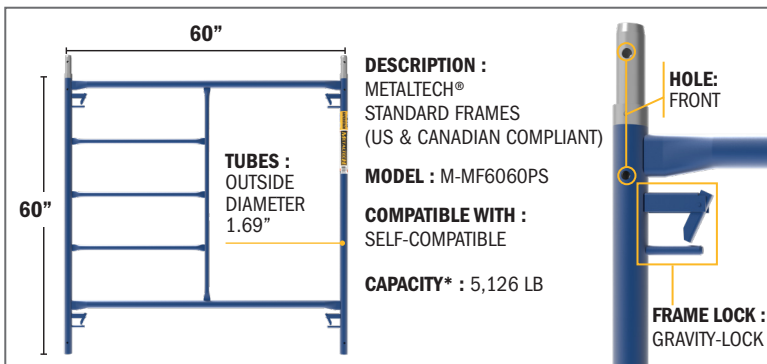

DESCRIPTION :
METALTECH®
STANDARD FRAMES
(US & CANADIAN COMPLIANT)

MODEL : M-MF6060PS


COMPATIBLE WITH :
SELF-COMPATIBLE

CAPACITY* : 5,126 LB

TUBES :
OUTSIDE
DIAMETER
1.69"

HOLE:
FRONT

FRAME LOCK :
GRAVITY-LOCK

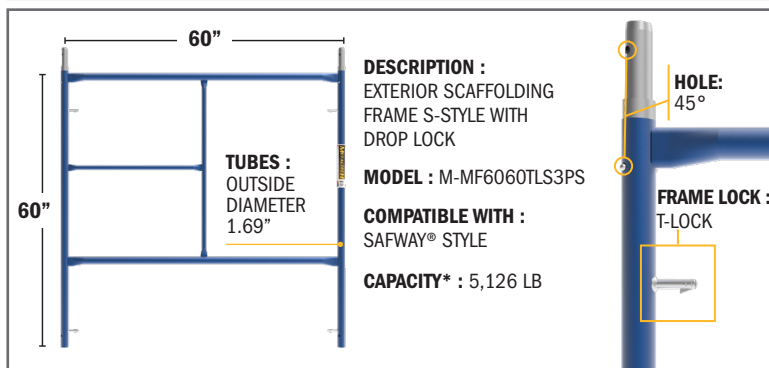

DESCRIPTION :
EXTERIOR SCAFFOLDING
FRAME S-STYLE WITH
DROP LOCK

MODEL : M-MF6060TLS3PS


COMPATIBLE WITH :
SAFWAY® STYLE

CAPACITY* : 5,126 LB

TUBES :
OUTSIDE
DIAMETER
1.69"

HOLE:
45°

FRAME LOCK :
T-LOCK

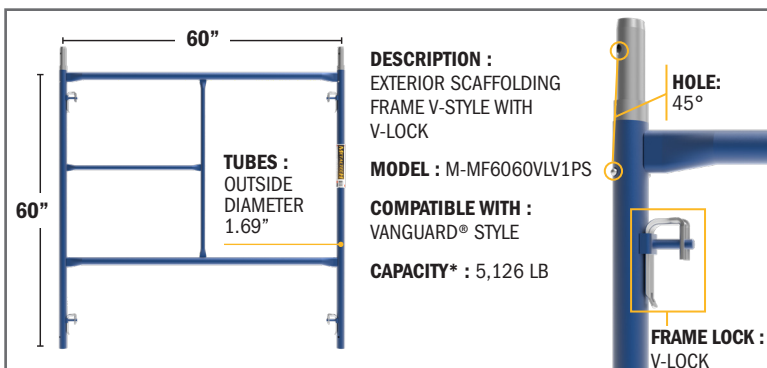

DESCRIPTION :
EXTERIOR SCAFFOLDING
FRAME V-STYLE WITH
V-LOCK

MODEL : M-MF6060VLV1PS


COMPATIBLE WITH :
VANGUARD® STYLE

CAPACITY* : 5,126 LB

TUBES :
OUTSIDE
DIAMETER
1.69"

HOLE:
45°

FRAME LOCK :
V-LOCK

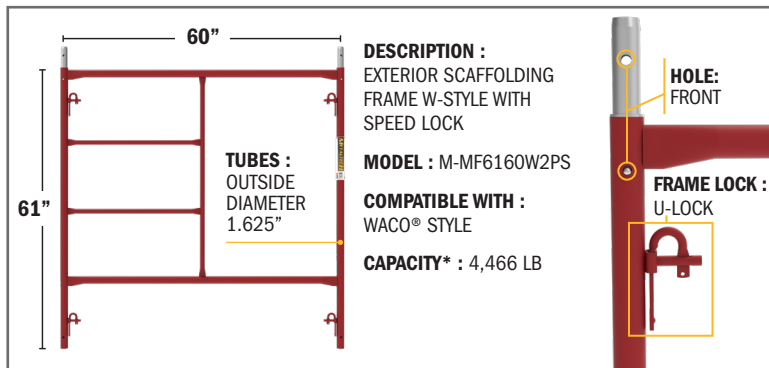

DESCRIPTION :
EXTERIOR SCAFFOLDING
FRAME W-STYLE WITH
SPEED LOCK

MODEL : M-MF6160W2PS


COMPATIBLE WITH :
WACO® STYLE

CAPACITY* : 4,466 LB

TUBES :
OUTSIDE
DIAMETER
1.625"

HOLE:
FRONT

FRAME LOCK :
U-LOCK

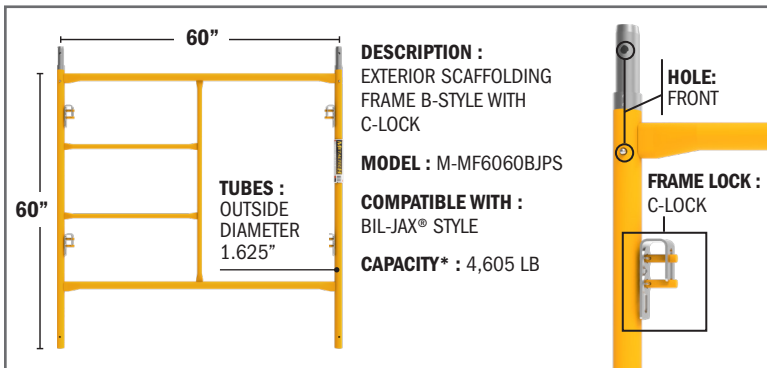

DESCRIPTION :
EXTERIOR SCAFFOLDING
FRAME B-STYLE WITH
C-LOCK

MODEL : M-MF6060BJPS


COMPATIBLE WITH :
BIL-JAX® STYLE

CAPACITY* : 4,605 LB

TUBES :
OUTSIDE
DIAMETER
1.625"

HOLE:
FRONT


FRAME LOCK :
C-LOCK

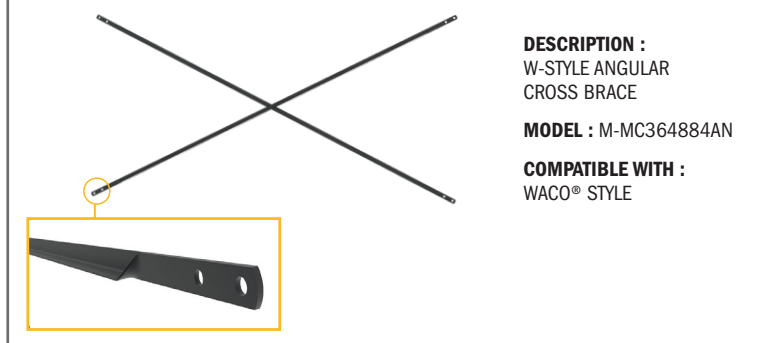

DESCRIPTION :
W-STYLE ANGULAR
CROSS BRACE

MODEL : M-MC364884AN

COMPATIBLE WITH :
WACO® STYLE

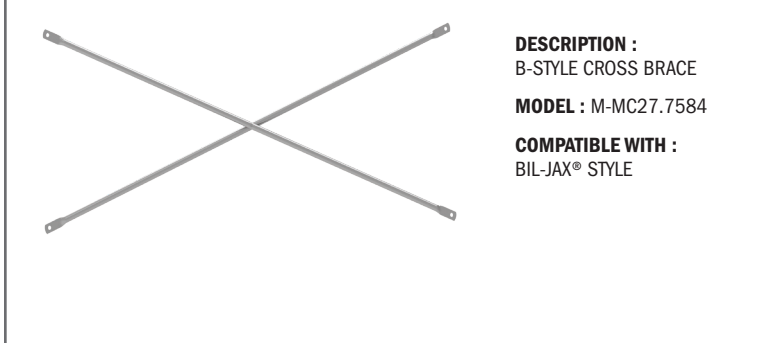

DESCRIPTION :
B-STYLE CROSS BRACE

MODEL : M-MC27.7584

COMPATIBLE WITH :
BIL-JAX® STYLE

*The stated capacity is based on the buckling of the frame's vertical posts. The maximum load must always comply with the most limiting component of the system.
All trademarks and registered trademarks listed above are the property of their respective owners.

SECURITY INFORMATION:

The 4-to-1 safety rule: According to OSHA guidelines, a scaffold height must not exceed four times its smallest base dimension

**HEAVY DUTY STEEL FRAME
NO TOOLS REQUIRED FOR ASSEMBLY**



T : 1 800 567-0605 (TOLL FREE NUMBER)
© : CS@METALTECH.CO
WWW.METALTECH.CO

