

NEW



**JOBSITE SERIES
TELESCOPING
MULTI-
POSITION
LADDER**

- Extension ladder
- Step ladder
- Stairway ladder
- 90° wall ladder

METALTECH®

**BUILT TOUGH FOR
SAFETY**

TELESCOPING MULTI- POSITION LADDER

5 IN 1 LOAD CAPACITY **300 LB** 136 KG


ANSI TYPE
IA

CSA
US
ANSI A14.2



	13' TELESCOPING MULTI-POSITION	17' TELESCOPING MULTI-POSITION	21' TELESCOPING MULTI-POSITION	25' TELESCOPING MULTI-POSITION
CLOSED DIMENSIONS (WXDXH)	22.25 X 7.75 X 42.75 IN. (56.5 X 19.7 X 108.6 CM)	23.5 X 8 X 54.5 IN. (59.7 X 20.3 X 138.4 CM)	26.75 X 8.75 X 66.5 IN. (67.9 X 22.2 X 168.9 CM)	29.5 X 8 X 78.5 IN. (74.9 X 20.3 X 199.4 CM)
LADDER HEIGHT	13 FT (4 M)	17 FT (5.2 M)	21 FT (6.4 M)	25 FT (7.6 M)
MAXIMUM REACH*	14 FT 4 IN. (4.4 M)	18 FT 1 IN. (5.5 M)	22 FT (6.7 M)	26 FT (7.9 M)
WEIGHT	27.6 LB (12.5 KG)	34.5 LB (15.6 KG)	42.3 LB (19.2 KG)	53.1 LB (24.1 KG)
NUMBER OF POSITIONS	19	28	38	49
LOAD CAPACITY	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)	300 LB (136 KG)
MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM	ALUMINUM
STANDARD	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, CSA GRADE 1A AND OSHA	ANSI TYPE IA, OSHA AND CSA US
MODEL	E-MTL7000AL	E-MTL7100AL	E-MTL7200AL	E-MTL7300AL
UPC	778300001590	778300001606	778300001613	778300000937
HIGHEST STANDING LEVEL				
STEPLADDER	2 FT 11 IN. (0.89 M)	4 FT 9 IN. (1.4 M)	6 FT 9 IN. (2.1 M)	8 FT 7 IN. (2.6 M)
EXTENSION LADDER	7 FT 9 IN. (2.4 M)	11 FT 7 IN. (3.5 M)	15 FT 5 IN. (3.5 M)	20 FT (6.1 M)
SCAFFOLD SUPPORTS	1 FT 11 IN. (0.58 M)	2 FT 11 IN. (0.89 M)	3 FT 10 IN. (1.2 M)	4 FT 9 IN. (1.4 M)

*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach.

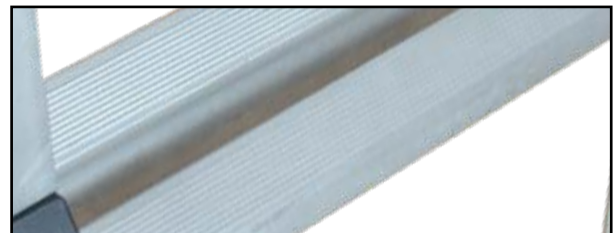

METALTECH

WWW.METALTECH.CO

1 800 363-7587