



JOBSITE SERIES 6' BAKER SAFECLIMB

- Anti-Slip Rungs
- Climb through platform
- Anti-Slip Deck
- 1,100 lb load capacity
- Stackable up to 3 units high for 24' reach
- Quick and easy height adjustment
- Meets ANSI, CSA and OSHA

METALTECH[®]



NO TOOLS
REQUIRED

OSHA
ANSI
CSA

MEETS

12'

REACH

1,100 lb

LOAD CAPACITY

BUILT TOUGH FOR
SAFETY

JOBSITE SERIES

6' BAKER SAFECLIMB

SAFECLIMB



ANTI-SLIP DECK

Made of 1/2" anti-slip film coated plywood




ANTI-SLIP RUNGS

Nonslip rungs help with moisture issues on footwear.




DOUBLE LOCKING 5" CASTERS



CLIMB THROUGH PLATFORM

Keeps your weight in the center of the unit for safer climbing.



STACKABLE UP TO 18'*


Easily stackable up to three units high in order to reach a range of 24'.



QUICK AND EASY HEIGHT ADJUSTMENT

Platform height adjusts at 2" increments from 27" to 73". Double prong spring-loaded locking mechanism.

AVAILABLE OPTIONS

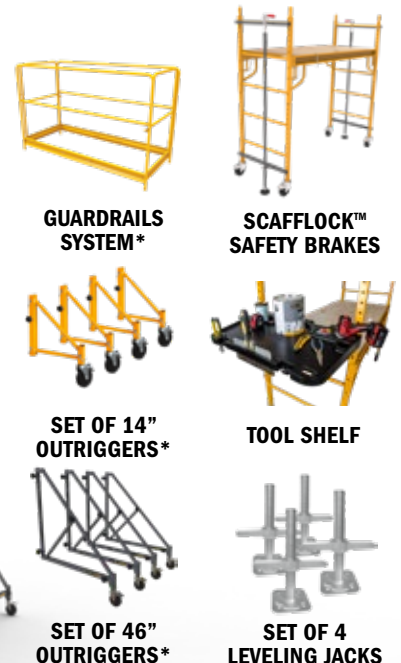

*Stacking units requires the use of outriggers and guardrails

6' BAKER, SAFECLIMB	
ASSEMBLED DIMENSIONS (WXDXH)	74.75 X 29.75 X 75 IN. (189.9 X 75.6 X 190.5 CM)
PACKAGE DIMENSIONS (WXDXH)	75 X 30.5 X 5.25 IN. (190.5 X 76.2 X 13.3 CM)
WEIGHT	120.3 LB (54.7 KG)
LOAD CAPACITY	1,100 LB (499 KG). COMBINED WEIGHT OF USER + MATERIALS
WORKING HEIGHTS	FROM 27 TO 73 IN. (68.6 TO 185 CM). 2 IN. (5 CM) INCREMENT ADJUSTABLE HEIGHTS
REACH	12 FT (3.7 M). STACKABLE UP TO 3 UNITS HIGH FOR 24 FT (7.4 M) REACH*
PLATFORM	1/2" (12 MM) PLYWOOD, SLIP-RESISTANT WITH TRAPDOOR
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
STANDARDS	ANSI, CSA AND OSHA
MODEL	I-CISCH1
UPC	778300001804



WWW.METALTECH.CO

1 800 363-7587