

**BUILT TO MEET**  
Grade

**SCAFFOLDING  
AND DRYWALL  
TRADES**



**METALTECH**

**BUILT TOUGH FOR  
SAFETY**





# HEAVY-DUTY

***Our industrial-grade products are built to take more abuse and heavier loads than any others on the market.***

BuildMan® Grade products are built to endure the most rugged jobsite environments that the Pros deal with every day. Our industrial-grade products are built to take more abuse and heavier loads than any others on the market. They are more stable, stronger and safer to use. From truck to jobsite and from jobsite to jobsite, Pros can rely on BuildMan®, whether you are installing drywall, ceiling systems or performing maintenance on equipment or buildings. Metaltech's BuildMan® Grade products are Built Tough for Safety.

**METALTECH®**

# BUILDMAN® DRYWALL & PANEL HOIST



HANG DRYWALL UP  
TO 14 FT 5 IN. HIGH

DRIVE  
CHAIN

FAST ACTION  
WINCH

6 IN.  
HEAVY DUTY CASTERS



CRADLE TILTS



MULTI-STAGE CHAIN  
MECHANISM



THREE 6 IN. (15 CM)  
DOUBLE LOCK HEAVY DUTY  
SWIVEL CASTERS



## TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (WxDxH)	60 1/4 X 48 3/4 X 58 1/4 IN. (153.3 X 124.1 X 148.1 CM)
WEIGHT	134.9 LB (61.2 KG)
LOAD CAPACITY	200 LB (90.7 KG)
MAXIMUM HEIGHT	14 FT 5 IN. (4.39 M)
LOADING HEIGHT	37 IN. (94 CM)
MAXIMUM PANEL SIZE	4 X 16 FT (1.22 X 4.87 M)
CHAINS	COMMERCIAL GRADE
CASTERS	6 IN. (15 CM) DOUBLE LOCKING HEAVY DUTY
MODEL	I-BMDPL
UPC	778300002078



**OPTIONAL  
STORAGE &  
TRANSPORT CART**



CHAIN  
MECHANISM



NON-  
MARKING

200 lb LOAD  
CAPACITY

14'-5" MAX  
HEIGHT



# 6' BUILDMAN® DRYWALL BAKER SCAFFOLD

**NEW** WITH  
**SAFECLIMB™**  
PLATFORM



SAFECLIMB TRAPDOOR  
AND ANTI-SLIP DECK



TIGHTENING HANDLE  
FOR MORE STABILITY

EACH END CAN ADJUST  
SEPARATELY TO BE USED  
ON BOTH LEVEL SURFACES  
AND STAIRWAYS



SAFECLIMB RUNG STEP



QUICK AND EASY HEIGHT  
ADJUSTMENT



COMPATIBLE  
BILJAX, BUFFALO,  
WERNER, UST AND  
METALTECH BAKER\*

TRAPDOOR

ANTI-SLIP  
DECK

1 3/4 IN.  
SQUARE TUBE

1 1/2 IN.  
ROUND TUBE

6 IN. DOUBLE LOCKING HEAVY DUTY  
NON-MARKING CASTERS

## TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (WxDxH)	75 3/4 X 31 X 76 IN. (192.4 X 78.7 X 193 CM)
WEIGHT	165 LB (74.8 KG)
LOAD CAPACITY	1,500 LB (680 KG) COMBINED WEIGHT OF USER + MATERIALS
WORKING HEIGHTS	FROM 29 TO 71 1/2 IN. (73.7 TO 181.6 CM). 2 IN. (5 CM) INCREMENT ADJUSTABLE HEIGHTS
REACH	12 FT (3.7 M). STACKABLE UP TO 3 UNITS HIGH FOR 24 FT (7.4 M) REACH
DECK (WxD)	29 X 67 IN. (73.7 X 170.2 CM) PLATFORM WITH TRAPDOOR. 19/32 IN. (15 MM) PLYWOOD, SLIP-RESISTANT
BRACE	DOUBLE LOCKING STEM MECHANISMS WITH TIGHTENING KNOBS TO PREVENT LOOSENESS IN THE STRUCTURE
CASTERS	6 IN. (15 CM) DOUBLE LOCKING HEAVY DUTY, NON-MARKING
MODEL	I-BMSS
UPC	778300100057

\* All trademarks and registered trademarks listed above are the property of their respective owners.

12' REACH

1,500 lb LOAD CAPACITY



ANTI-SLIP DECK



TRAPDOOR ACCESS



NON-MARKING



STACKABLE

OSHA  
ANSI  
CSA

# ACCESSORIES

## FOR 6' BUILDMAN® DRYWALL BAKER SCAFFOLD



**CLIMB-N-GO  
MOTORIZED SYSTEM  
FOR BAKER TYPE  
SCAFFOLD**

MODEL: I-CNG  
UPC: 778300006083



**GUARDRAILS SYSTEM**

MODEL: I-BMSGJP  
UPC: 778300001828



**SET OF 14 IN.  
OUTRIGGERS  
WITH CASTERS  
FOR 2 UNITS HIGH**

MODEL: I-BMS04  
UPC: 778300100262



**SET OF 46 IN.  
OUTRIGGERS  
WITH CASTERS  
FOR 3 UNITS HIGH**

MODEL: I-BMS04TT  
UPC: 778300003792



**39 IN. HIGH EXTENSION**

MODEL: I-BMSSEX  
UPC: 778300001323



SCAFFL@CK

**SAFETY BRAKES**

MODEL: I-ISL  
UPC: 778300001552



**SET OF 4  
LEVELING JACKS**

MODEL: I-IBSJP12H4  
UPC: 778300001644



**SET OF 4  
BASE PLATES**

MODEL: I-IBBF4  
UPC: 778300001699

**GUARDRAILS  
SYSTEM**

**3 UNITS  
TOWER  
24 FT  
REACH**

17.5'

**46 IN.  
OUTRIGGERS**





# 6' BUILDMAN<sup>®</sup> PORTABLE SCAFFOLD



ANTI-SLIP PLATFORMS




TWO-MINUTE ASSEMBLY



FOLDS FLAT FOR COMPACT  
STORAGE AND TRANSPORT



TRANSPORT 1,000 LB  
(454 KG) CAPACITY

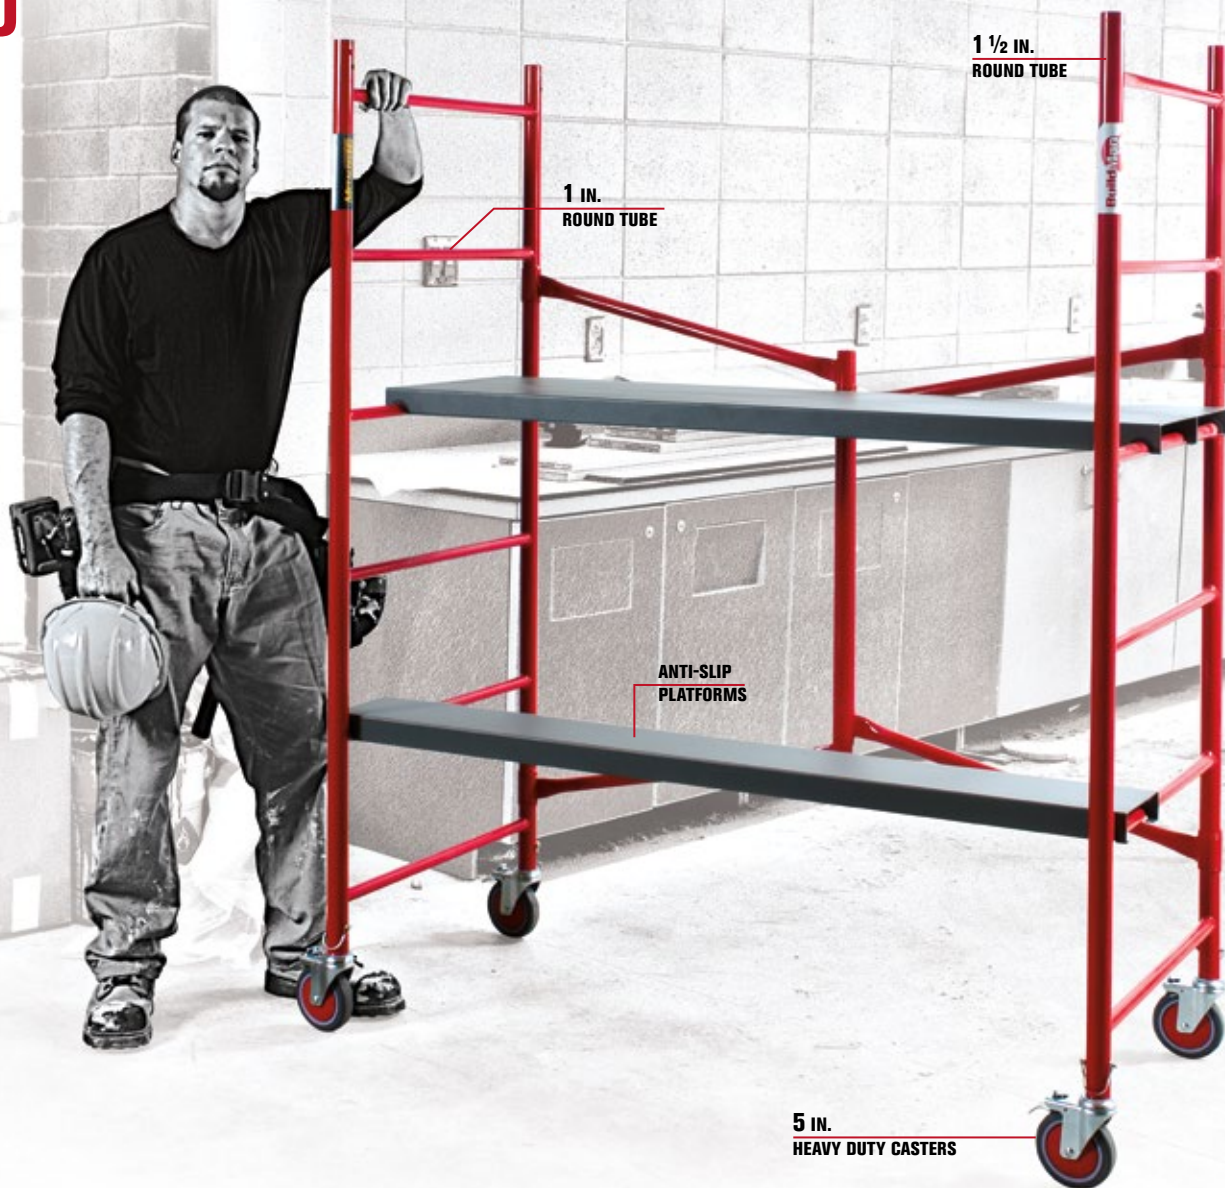

1 1/2 IN.  
ROUND TUBE

1 IN.  
ROUND TUBE

ANTI-SLIP  
PLATFORMS

5 IN.  
HEAVY DUTY CASTERS

## TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (WxDxH)	59 1/4 X 30 X 74 IN. (150.5 X 76.2 X 188 CM)
WEIGHT	115 LB (52.3 KG)
LOAD CAPACITY	1,000 LB (454 KG) COMBINED WEIGHT OF USER + MATERIALS LARGE PLATFORMS: MAX. 375 LB (170 KG) / SMALL PLATFORM: MAX. 250 LB (113 KG)
WORKING HEIGHTS	FROM 11 3/4 TO 71 3/4 IN. (29.9 TO 182.3 CM). 12 IN. (30.5 CM) INCREMENT
REACH	12 FT (3.7 M). STACKABLE UP TO 2 UNITS HIGH FOR 18 FT (5.5 M) REACH
PLATFORMS (WxDxH)	2 PLATFORMS OF 58 1/4 X 8 3/4 X 2 IN. (148 X 22.2 X 5.1 CM) 14 GAUGE STEEL 1 PLATFORM OF 58 1/4 X 6 1/2 X 2 IN. (148 X 16.5 X 5.1 CM) 14 GAUGE STEEL
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
MODEL	I-BM6S
UPC	778300100064

12' REACH

1,000 lb LOAD CAPACITY



ANTI-SLIP  
PLATFORMS



NON-MARKING



STACKABLE

OSHA  
ANSI  
CSA



# ACCESSORIES

FOR 6' BUILDMAN® PORTABLE  
SCAFFOLD



**GUARDRAILS SYSTEM**  
MODEL: I-BM6GR  
UPC: 778300100491



**SET OF 14 IN. OUTRIGGERS  
WITH CASTERS  
FOR 2 UNITS HIGH**  
MODEL: I-BM6D4  
UPC: 778300100477



**SET OF 4  
COUPLING PINS**  
MODEL: I-BM6C4  
UPC: 778300100538

## COMPLETE SYSTEM



**GUARDRAILS AND OUTRIGGERS  
COMPLETE SYSTEM**  
MODEL: I-BM6SK  
UPC: 778300100361

**GUARDRAILS  
SYSTEM**

**12'**  
**2 UNITS  
TOWER  
18 FT  
REACH**

**14 IN.  
OUTRIGGERS**





# 4' BUILDMAN® PORTABLE SCAFFOLD



CONVENIENT FOLD AWAY  
TOOL SHELF FOR PAINT  
CAN, BUCKET, SCREWS,  
NAILS AND TOOLS



SAFETY RAIL TO HOLD ON  
TO, FOR STABILITY



FOLDS FLAT FOR  
COMPACT STORAGE AND  
TRANSPORT



TRANSPORT  
750 LB (340 KG) CAPACITY



SAFETY  
HANDRAIL

TOOL SHELF

ANTI-SLIP  
PLATFORMS

1 ¼ IN.  
ROUND TUBE

5 IN.  
HEAVY DUTY CASTERS

1 IN.  
ROUND TUBE

## TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (WxDxH)	50 ½ X 23 ¾ X 61 ½ IN. (128.3 X 60.3 X 156.2 CM)
WEIGHT	69 LB (31.3 KG)
LOAD CAPACITY	750 LB (340 KG) COMBINED WEIGHT OF USER + MATERIALS. 450 LB (204 KG) PER PLATFORM
WORKING HEIGHTS	10 - 21 ½ - 33 IN. (25.4 - 54.61 - 83.82 CM)
REACH	9 FT (2.75 M)
PLATFORMS (WxDxH)	2 PLATFORMS OF 40" X 8" X 1 ¼ IN. (103.2 X 22.2 X 4.4 CM)
CASTERS	5 IN. (13 CM) DOUBLE LOCKING HEAVY DUTY
MODEL	I-BM4S
UPC	778300100040



# BUILDMAN<sup>®</sup> DRYWALL STILTS



ADJUSTABLE HEIGHTS



DUAL SPRING ACTION



CONTACT GRIP

SECURE SELF-LOCKING  
METAL BUCKLE STRAPS

PADDED  
COMFORT STRAPS

DUAL SPRING  
ACTION

ADJUSTABLE  
STRUT TUBE

CONTACT GRIP  
ONE PIECE RUBBER OUTSOLE



## 18"- 30" DRYWALL STILTS

### TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (1 STILT) (WxDxH)	12½ X 6 X 38 IN. (31.8 X 15.2 X 96.5 CM)
ADJUSTABLE HEIGHTS	18 UP TO 30 IN. (46 UP TO 76 CM.) 2 IN. (5 CM) INCREMENT ADJUSTABLE HEIGHTS
MAXIMUM REACH*	9 FT 3 IN. (2.82 M)
MATERIAL	ANODIZED ALUMINUM
WEIGHT (1 STILT)	7.1 LB (3.2 KG)
LOAD CAPACITY	225 LB (102 KG)
MODEL	I-BMDS1830
UPC	778300001989

\*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach

## 24"- 40" DRYWALL STILTS

ASSEMBLED DIMENSIONS (1 STILT) (WxDxH)	12½ X 6 X 44 IN. (31.8 X 15.2 X 111.8 CM)
ADJUSTABLE HEIGHTS	24 UP TO 40 IN. (61 CM UP TO 1.02 M) 2 IN. (5 CM) INCREMENT ADJUSTABLE HEIGHTS
MAXIMUM REACH*	10 FT (3.5 M)
MATERIAL	ANODIZED ALUMINUM
WEIGHT (1 STILT)	8.1 LB (3.7 KG)
LOAD CAPACITY	225 LB (102 KG)
MODEL	I-BMDS2440
UPC	778300001996

# DRYWALL CARTS

## WALL HAULER™ SERIES 2000 RESIDENTIAL WELDED



### TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (WxDxH)	38 X 19 ¾ X 44 ½ IN. (96.5 X 48.3 X 113 CM)
PLATFORM DIMENSIONS	10 ½ X 38 IN. (26.7 X 96.5 CM) CAN CARRY UP TO 20 GYPSUM BOARDS OF 1/2 IN. (13 MM)
WEIGHT	81.5 LB (37 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1 ½ IN. (2.9 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL
SLIDING COATING	STANDARD

	MODELS	UPC	CASTERS		
			POLYURETHANE*	PHENOLIC	KINGPINLESS
YELLOW COLOR	I-BMD2131YGR	778300000098	•		
	I-BMD2131YGP	778300002771		•	
	I-BMD2131YGRK	778300002788	•		•
	I-BMD2131YGPk	778300002795		•	•
RED COLOR	I-BMD2131R	778300100354	•		
	I-BMD2131P	778300002801		•	
	I-BMD2131RK	778300002818	•		•
	I-BMD2131PK	778300002825		•	•

\*POLYPROPYLENE CORE

## WALL HAULER™ SERIES 2000 RESIDENTIAL WELDED



### TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (WxDxH)	40 X 16 ¾ X 44 ¼ IN. (101.6 X 42.6 X 112.4 CM)
PLATFORM DIMENSIONS	9.5 X 40 IN. (24.1 X 101.6 CM) CAN CARRY UP TO 19 GYPSUM BOARDS OF 1/2 IN. (13 MM)
WEIGHT	70.27 LB (37 KG)
LOAD CAPACITY	2,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1 ½ IN. (2.9 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL
SLIDING COATING	STANDARD

	MODELS	UPC	CASTERS		
			POLYURETHANE*	PHENOLIC	KINGPINLESS
YELLOW COLOR	I-BMD1931YGR	778300004201	•		
	I-BMD1931YGP			•	
	I-BMD1931YGRK		•		•
	I-BMD1931YGPk			•	•

\*POLYPROPYLENE CORE



# WALL HAULER™ SERIES 3000 PERMAQUICK CONNECT™

PERMAQUICK  
CONNECT™



8 IN.  
HEAVY DUTY CASTERS

## TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (WxDxH)	43 1/2 X 24 X 48 3/4 IN. (110.5 X 61 X 123.8 CM)
PLATFORM DIMENSIONS	12 X 42 IN. (30.5 X 106.7 CM) CAN CARRY UP TO 24 GYPSUM BOARDS OF 1/2 IN. (13 MM)
WEIGHT	93 LB (42 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1 1/4 IN. (3.2 CM) OUTSIDE DIAMETER. 14 GAUGE STEEL
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP)

	MODELS	UPC	CASTERS		
			POLYURETHANE*	PHENOLIC	KINGPINLESS
RED COLOR	I-BMD3031R	778300100071	•		
	I-BMD3031P	778300100194		•	
	I-BMD3031RK	778300100255	•		•
	I-BMD3031PK	778300100316		•	•

\*POLYPROPYLENE CORE

# WALL HAULER™ SERIES 3000 WELDED

FULLY WELDED  
FRAME



8 IN.  
HEAVY DUTY CASTERS

## TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (WxDxH)	49 1/4 X 22 1/4 X 48 1/2 IN. (125.1 X 56.5 X 123.2 CM)
PLATFORM DIMENSIONS	11 1/2 X 42 IN. (29.2 X 106.7 CM) CAN CARRY UP TO 22 GYPSUM BOARDS OF 1/2 IN. (13 MM)
WEIGHT	80 LB (36.3 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1 1/4 IN. (3.2 CM) OUTSIDE DIAMETER. 14 GAUGE STEEL
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP)

	MODELS	UPC	CASTERS		
			POLYURETHANE*	PHENOLIC	KINGPINLESS
YELLOW COLOR	I-BMD3131YGR	778300000104	•		
	I-BMD3131YGP	7783000002719		•	
	I-BMD3131YGRK	7783000002726	•		•
	I-BMD3131YGPk	7783000002733		•	•

\*POLYPROPYLENE CORE

24 GYPSUM  
BOARDS

3,000 lb LOAD  
CAPACITY



PERMAQUICK  
CONNECT™

3,000 lb LOAD  
CAPACITY

22 GYPSUM  
BOARDS

# WALL HAULER™ SERIES 3600

## REMOVABLE HANDLE



### TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (WxDxH)	44 ¼ X 22 X 47 ¼ IN. (112.4 X 55.9 X 120 CM)
PLATFORM DIMENSIONS	11 ½ X 44 ¼ IN. (29.2 X 112.4 CM) CAN CARRY UP TO 22 GYPSUM BOARDS OF 1/2 IN. (13 MM)
WEIGHT	90 LB (40.8 KG)
LOAD CAPACITY	3,600 LB (1,633 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.65 IN. (4.2 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL
OPTION	SLIDING COATING, PROTECTS THE SURFACE AGAINST ABRASION (MODEL: I-BMDSP)

		CASTERS		
		POLYURETHANE*	PHENOLIC	KINGPINLESS
RED COLOR	MODELS	UPC		
	I-BMD3631R	778300100170	•	
	I-BMD3631P	778300100002		•
	I-BMD3631RK	778300100187	•	•
	I-BMD3631PK	778300100096	•	•

\*POLYPROPYLENE CORE

# WALL HAULER™ SERIES 4000

## COMMERCIAL WELDED



### TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (WxDxH)	60 X 29 ½ X 48 IN. (152.4 X 74.9 X 121.9 CM)
PLATFORM DIMENSIONS	19 X 50 IN. (48.2 X 127 CM) CAN CARRY UP TO 36 GYPSUM BOARDS OF 1/2 IN. (13 MM)
WEIGHT	151 LB (68.5 KG)
LOAD CAPACITY	3,600 LB (1,633 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS WITH STEEL CORE, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	1.5 IN. (3.8 CM) OUTSIDE DIAMETER. 13 GAUGE STEEL

		CASTERS		
		POLYURETHANE*	PHENOLIC	KINGPINLESS
YELLOW COLOR	MODELS	UPC		
	I-BMD4031YGR	778300004218	•	
	I-BMD4031YGRK		•	•

\*STEEL CORE





# H-CART MULTI-USES



**1 DRYWALL CART**

**2 MATERIAL PUSH CART**

**3 RESTRAINED TRANSPORT**

**4 FLAT BED**

## TECHNICAL FEATURES

ASSEMBLED DIMENSIONS (WxDxH)	50 X 27¾ X 48¼ IN. (127 X 70.5 X 122.6 CM)
PLATFORM DIMENSIONS	50 X 16½ IN. (127 X 42 CM) CAN CARRY UP TO 25 GYPSUM BOARDS OF 1/2 IN. 50 X 27¾ IN. (127 X 70.5 CM) FLAT BED CONFIGURATION
WEIGHT	101 LB (45.8 KG)
LOAD CAPACITY	3,000 LB (1,361 KG)
FINISH	POWDER COATED
CASTERS	8 IN. (20 CM). 4 SWIVEL CASTERS, 1 DIRECTIONAL LOCK AND 1 CASTER BRAKE
HANDLE BAR	2 IN. (5 CM) OUTSIDE DIAMETER. 9 GAUGE STEEL

	MODELS	UPC	CASTERS		
			POLYURETHANE*	PHENOLIC	KINGPINLESS
YELLOW COLOR	I-BMDHER31YGR	778300000548	•		
	I-BMDHER31YGP	778300002832		•	
	I-BMDHER31YGRK	778300002849	•		•
	I-BMDHER31YGPK	778300002856		•	•

\*POLYPROPYLENE CORE

# WALL HAULER™ OPTIONS AND ADDITIONAL INFORMATION



## POLYURETHANE CASTER

SHOCK-ABSORBING, NON-MARKING AND SUPERIOR IMPACT RESISTANCE.



## PHENOLIC CASTER

LIGHTWEIGHT, PERFECT FOR CARRYING HEAVY LOADS, RESISTANT TO GREASE, OIL AND CHEMICALS.



## KINGPINLESS SWIVEL DESIGN

HIGH IMPACT RESISTANCE TO ABUSE AND BETTER PERFORMANCE.



## SLIDING COATING

PROTECTS THE SURFACE AGAINST ABRASION.

# JAW CLAW™ PANEL GRIPPER



## TECHNICAL FEATURES

GRIPPER, CLAMP	ADJUSTS TO PANEL UP TO 1 1/8 IN.
MATERIAL	AIRCRAFT GRADE ALUMINUM AND ABS POLYMER
WEIGHT	1.95 LB (0.88 KG)
LOAD CAPACITY	200 LB (90.7 KG)
MODEL	I-JC
UPC	778300003297

**25** GYPSUM  
BOARDS

**3,000 lb** LOAD  
CAPACITY



REMOVABLE  
HANDLE

# 18" – 30" DRYWALL BENCH



**AUTO-LOCKING SYSTEM  
WITH LOCK INDICATOR  
DEVICE**



**EXTRA-WIDE STEP-UP**



**ANTI-SLIP HEAVY-DUTY  
FOOTING**

**18 UP TO 30 IN.  
ADJUSTABLE HEIGHTS**

**EXTRA-WIDE  
STEP-UP**

**ANTI-SLIP HEAVY-DUTY  
FOOTING**

**10 IN. WIDE  
ANTI-SLIP TOP**

**AUTO-LOCKING SYSTEM  
WITH LOCK INDICATOR DEVICE**

**500 LB  
LOAD CAPACITY**

## TECHNICAL FEATURES

OPEN BENCH (WxDxH)	48 X 17 1/2 X 18 UP TO 30 IN. (121.9 X 44.5 X 46 UP TO 76 CM)
CLOSED BENCH (WxDxH)	48 X 17 1/2 X 6.25 IN. (121.9 X 44.5 X 15.9 CM)
WORK SURFACE (WxD)	48 X 9 1/2 IN. (121.9 X 24.1 CM)
WORKING HEIGHT	18 UP TO 30 IN. (46 UP TO 76 CM) 2 IN. (5 CM) INCREMENT ADJUSTABLE HEIGHTS
MAXIMUM REACH*	9 FT 3 IN. (2.82 M)
MATERIAL	ALUMINUM 6061-T6
WEIGHT	29.3 LB (13.3 KG)
LOAD CAPACITY	500 LB (227 KG)
MODEL	I-BMDWB18
UPC	778300002009

\*Calculated with a 5'9" (1.75 m) person with a vertical 12" (30 cm) reach



**9'-3" REACH**

**500 lb LOAD CAPACITY**



**18" UP TO 30" ADJUSTABLE HEIGHTS**



# WORK STAND SAWHORSE

## 2' ALUMINUM WORK STAND SAWHORSE



### TECHNICAL FEATURES

OPEN DIMENSIONS (WxDxH)	26 1/4 X 28 1/4 X 23 3/4 IN. (66.5 X 71.9 X 60.1 CM)
CLOSED DIMENSIONS (WxDxH)	26 1/4 X 11 1/2 X 27 1/2 IN. (66.5 X 29 X 69.8 CM)
DECK DIMENSIONS (WxD)	23 3/4 X 12 1/4 IN. (60.3 X 31.1 CM)
LOAD CAPACITY	300 LB (136 KG)
WEIGHT	13.2 LB (6 KG)
MATERIAL	ALUMINUM
MODEL	E-PWS7000AL
UPC	778300002030

## 3' ALUMINUM WORK STAND SAWHORSE



### TECHNICAL FEATURES

OPEN DIMENSIONS (WxDxH)	27 1/4 X 36 1/4 X 35 IN. (69.5 X 91.9 X 89.2 CM)
CLOSED DIMENSIONS (WxDxH)	27 1/4 X 11 1/2 X 39 1/2 IN. (69.5 X 29.4 X 100.5 CM)
DECK DIMENSIONS (WxD)	23 3/4 X 12 1/4 IN. (60.3 X 31.1 CM)
LOAD CAPACITY	300 LB (136 KG)
WEIGHT	17.4 LB (7.9 KG)
MATERIAL	ALUMINUM
MODEL	E-PWS7100AL
UPC	778300002047

## 4' ALUMINUM WORK STAND SAWHORSE



### TECHNICAL FEATURES

OPEN DIMENSIONS (WxDxH)	28 1/2 X 45 X 46 1/2 IN. (72.4 X 114.5 X 118 CM)
CLOSED DIMENSIONS (WxDxH)	28 1/2 X 11 3/4 X 51 3/4 IN. (72.4 X 29.6 X 131.5 CM)
DECK DIMENSIONS (WxD)	23 3/4 X 12 1/4 IN. (60.3 X 31.1 CM)
LOAD CAPACITY	300 LB (136 KG)
WEIGHT	21.9 LB (9.9 KG)
MATERIAL	ALUMINUM
MODEL	E-PWS7200AL
UPC	778300002054

## 5' ALUMINUM WORK STAND SAWHORSE



### TECHNICAL FEATURES

OPEN DIMENSIONS (WxDxH)	29 1/2 X 53 1/2 X 58 IN. (75.1 X 135.8 X 147.3 CM)
CLOSED DIMENSIONS (WxDxH)	29 1/2 X 11 3/4 X 64 IN. (75.1 X 29.7 X 162.4 CM)
DECK DIMENSIONS (WxD)	23 3/4 X 12 1/4 IN. (60.3 X 31.1 CM)
LOAD CAPACITY	300 LB (136 KG)
WEIGHT	26 LB (11.8 KG)
MATERIAL	ALUMINUM
MODEL	E-PWS7300AL
UPC	778300000494



**BUILDMAN® GRADE PRODUCTS ARE BUILT TO ENDURE THE MOST RUGGED  
JOBSITE ENVIRONMENTS THAT THE PROS DEAL WITH EVERY DAY**



**CUSTOMER SERVICE**

**T : 1 800 363-7587 (TOLL FREE NUMBER)**

**F : 1 866 517-7585**

**@ : CS@METALTECH.CO**

**WWW.METALTECH.CO**

