



THE TOWER

- Electrical safe
- Lightweight
- Inert
- Corrosion resistant
- Use every frame as base, building or guardrail frame
- Erect in minutes
- 225 kg (500 lb) capacity
- Ideal for: Electricity substations, Railway stations, Building sites, Battery rooms, Chemical environments, Computer rooms, Foundries, Aircraft maintenance, Mines

METALTECH®



BUILT TOUGH FOR SAFETY



THE RIGHT SCAFFOLDING FOR PREVENTING ELECTRIFICATION

When safety matters, the choice of fiberglass scaffolding is crucial. Ideal for work in electrical environments.

The tower fiberglass scaffolding is inert, with no conductivity to electricity or reaction to chemicals, making it suitable for use in electrical environments from substations to computer rooms.

The tower is easy to assemble, as every frame can be used as a frame, building frame or guard rail frame.

THE TOWER

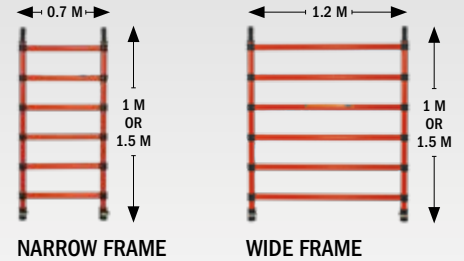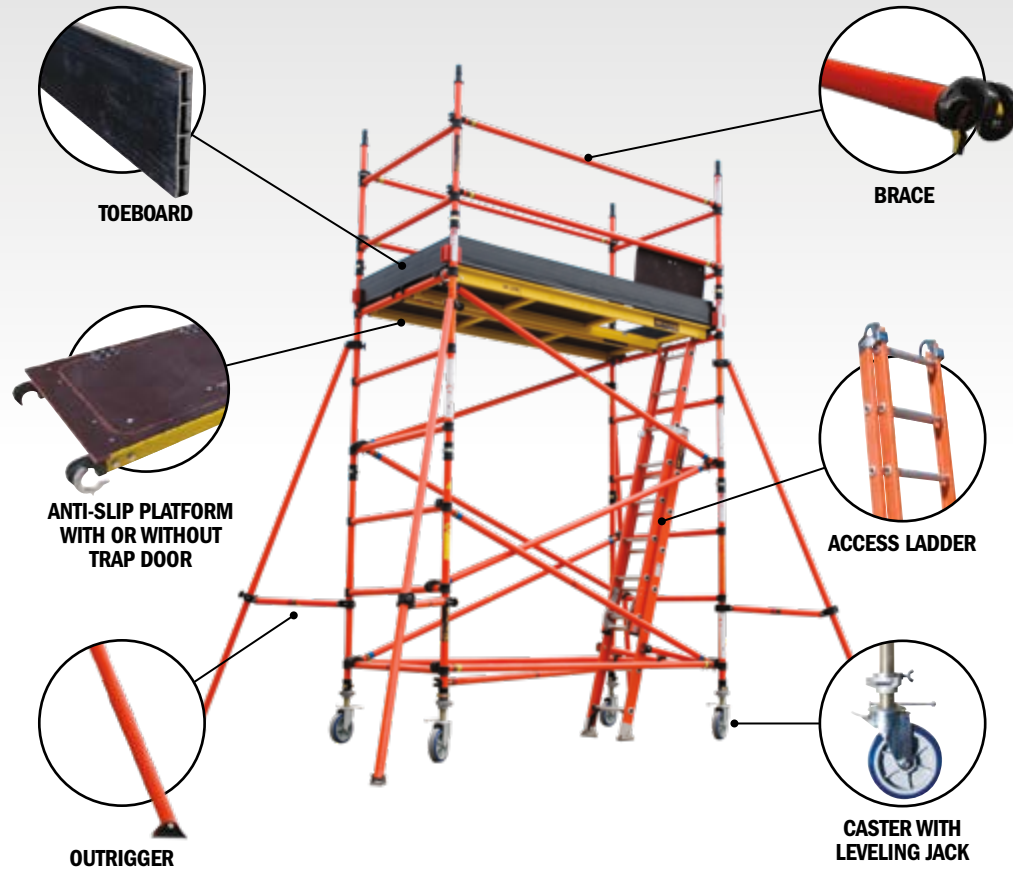

20 TOWER CONFIGURATIONS

Imperial units for approximate reference only.	FRAME WIDTH	
	NARROW 0.7 M (2 FT.)	WIDE 1.2 M (4 FT.)
1.5 M (4'-11 1/16")	1.5 M (4'-11 1/16")	1.5 M (4'-11 1/16")
2 M (6'-6 3/4")	2 M (6'-6 3/4")	2 M (6'-6 3/4")
2.5 M (8'-2 7/16")	2.5 M (8'-2 7/16")	2.5 M (8'-2 7/16")
3M (9'-10 1/8")	3M (9'-10 1/8")	3M (9'-10 1/8")
3.5 M (11'-5 25/32")	3.5 M (11'-5 25/32")	3.5 M (11'-5 25/32")
4 M (13'-1 15/32")	4 M (13'-1 15/32")	4 M (13'-1 15/32")
4.5 M (14'-9 5/32")	4.5 M (14'-9 5/32")	4.5 M (14'-9 5/32")
5 M (16'-4 27/32")	5 M (16'-4 27/32")	5 M (16'-4 27/32")
-	-	5.5 M (18' 17/32")
-	-	6 M (19'-8 7/32")
-	-	6.5 M (21'-3 29/32")
-	-	7 M (22'-11 19/32")



Tested in conformity to CSA standard S269.2 M87 / Imperial units for approximate reference only.



WWW.METALTECH.CO

1 800 363-7587