



# ACCESS HATCH GUARD

- Installs without perforating roof membrane
- 225 lb rating
- Adaptable to any size access hatch
- Quick and easy, permanent and temporary installation
- Multiple installation configurations to meet your specific needs

**METALTECH**®



## REGULATIONS/STANDARDS

- ✓ NBC\*
- ✓ RSST
- ✓ CSTC
- ✓ OBC
- ✓ CNESST
- ✓ OSHA
- ✓ ANSI
- ✓ WORKSAFE BC

\* Our guardrail system can be used in the construction field and for the maintenance of buildings, excluding houses and small buildings as defined in Article 1.3.3. of Division A of the National Building Code (NBC), which are buildings of no more than 3 floors and having an area of not more than 600 m<sup>2</sup> for non-industrial use.


**BUILT TOUGH FOR  
SAFETY**

# ACCESS HATCH GUARD

## A system according to your needs to prevent falls into access hatches or protect a skylight


- Quick and easy installation
- Adaptable to all access hatch dimensions

### TWO TYPES OF INSTALLATION

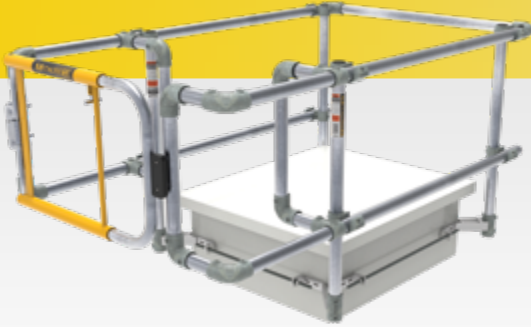

#### COMPRESSION ATTACHMENT

Without perforation for permanent or temporary installation.

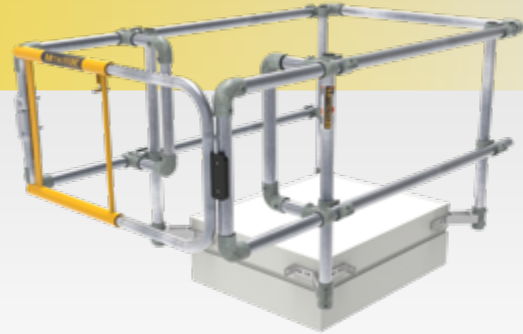

#### ANCHORED GUARDRAILS

Using screws on the metal drip edge of the access hatch for a permanent solution.

### TWO CLEARANCE ZONE OPTIONS



#### NO CLEARANCE

One foot between the access hatch and the door. Advantageous for tight spaces.



#### HANDRAILS

Two feet between the access hatch and the door, with a handrail to exit the access hatch.

#### SELF-CLOSING EXTENDABLE DOOR




The extendable door can be adjusted from 32 to 46 inches.

Made of aluminum and steel for easy adjustment

#### SPECIFICATIONS

<b>MATERIALS</b>	<b>Tubes and posts:</b> 6061-T6 aluminum - 1.9 in. OD or galvanized steel 1.9 in. O.D. <b>Clamps and joints:</b> galvanized steel. <b>Brackets:</b> made of galvanized steel, robust and simplified to have the least amount of hardware.
<b>COMPRESSION</b>	Use of threaded rod and galvanized steel nuts to ensure adequate tightness.
<b>FIXATION</b>	The guardrail can be fixed to the access hatch or skylight using anchor screws.
<b>DOOR</b>	• Retractable and extendable from 32 to 46 in. • High visibility orange color.
<b>USE</b>	• Permanent installation on the roof. • Adaptable for a personalized solution. • Railings can be installed around a skylight or access hatch.
<b>COMPLIANCE WITH</b>	NBC, CSTC, CNESST, ANSI, RSST, OBC
<b>COMPATIBILITY</b>	Standard and stackable guardrail systems.

#### DISTANCE / DIMENSION TO RESPECT WHEN INSTALLING THE GUARDRAIL.

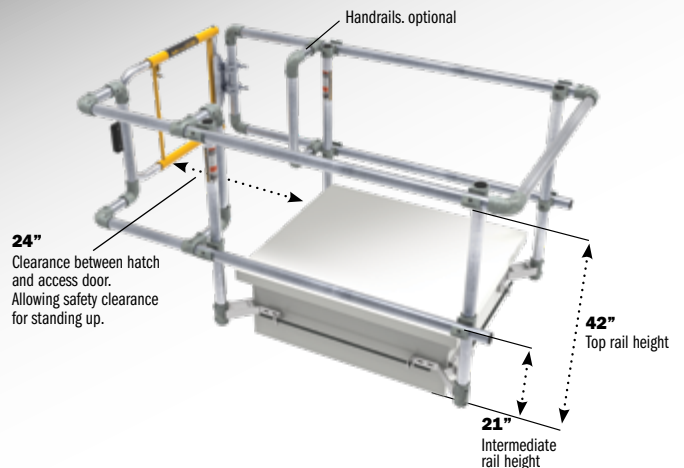

WWW.METALTECH.CO

1 800 363-7587