

METALTECH SCAFFOLDING IS IN STOCK IN EUROPE



**BUILT TOUGH FOR
SAFETY**

SAFECLIMB™ 6'

MOBILE BAKER SCAFFOLD



ANTI-SLIP DECK
Made of 1.27 cm anti-slip,
film-faced plywood



CLIMB THROUGH PLATFORM
Keeps your weight in the center
of the unit for safer climbing.



**ANTI-SLIP
SIDE FRAME**



ERGONOMIC HANDLES




DOUBLE LOCKING
13 cm casters



TIGHTENING HANDLE
For extra stability

NEW COMPLIES
WITH EUROPEAN
STANDARD

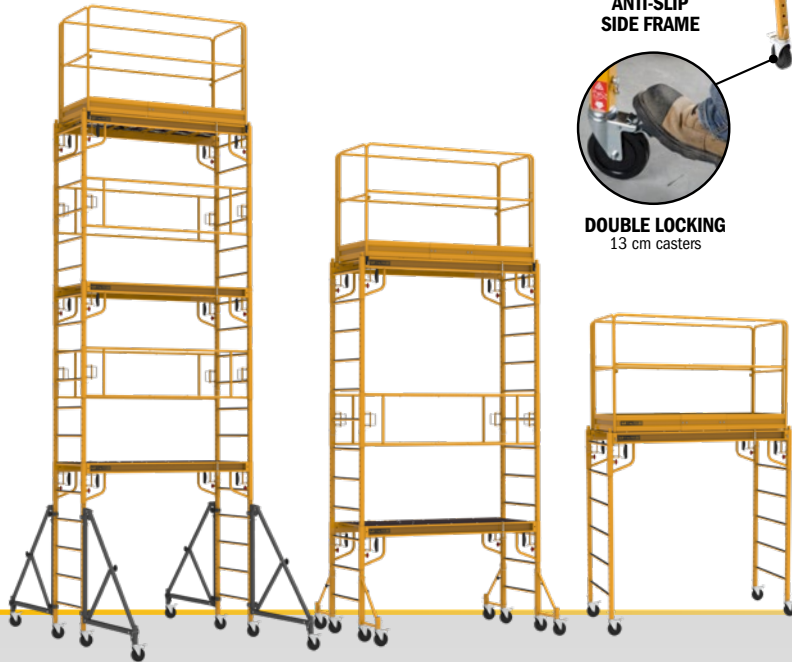

DIMENSIONS (W x D x H)	189.9 X 75.6 X 190.5 cm
WEIGHT	52 kg
LOAD CAPACITY	567 kg. Combined weight of user + materials
WORKING HEIGHTS	68.6 to 185 cm
REACH	3.84 m. Stackable up to 3 units high for 7.16 m reach
STANDARDS	EN 1004
CASTERS	13 cm double locking heavy-duty
MODEL	I-CISCUEM2

GUARDRAIL SYSTEM



- Use for added safety or when stacking units.
- Two doors allowing easy access to the platform
- Includes toe board to prevent tools from falling

DIMENSIONS (W x D x H)	177.2 X 74.3 X 113 cm
WEIGHT	30 kg
STANDARDS	EN 1004
MODEL	I-CISGRJPEUM2

STEEL ACCESS SAFETY GUARDRAIL



- Enhanced safety at every level
- Fast and easy installation
- Required for stacked scaffolds to comply with EN 1004 standards

DIMENSIONS (W x D x H)	187.3 X 76.2 X 50.2 cm
WEIGHT	15 kg
MODEL	I-CISCPYGREUM2

SET OF FOUR 35 cm OUTRIGGERS



- Use when stacking 2 units.
- 13 cm heavy-duty casters
- Stabilizers provide extra support to the entire structure


DIMENSIONS (W x D x H)	40.6 X 9.5 X 59.25 cm
WEIGHT	14.25 kg
MODEL	I-CIS04

SET OF FOUR 117 cm OUTRIGGERS



- Use when stacking 3 units.
- 13 cm heavy-duty casters
- Adjustable at 45° or 90° angle

DIMENSIONS (W x D x H)	132 X 9.5 X 123 cm
WEIGHT	44.5 kg
MODEL	I-BMS04TT



SET OF 4 LEVELING JACKS

- Perfect to adjust Scaffold level on uneven ground
- Quick and easy height adjustment
- 15 cm maximum height adjustment

DIMENSIONS (W x D x H)	23.6 X 13.5 X 31 cm
WEIGHT	11 kg
MODEL	I-BSJP12H4



SET OF FOUR BASE PLATES

- Stabilizes Baker towers on flat surfaces
- Compatible with all Metaltech Baker

DIMENSIONS (W x D x H)	12 X 12 X 12 cm
WEIGHT	4.6 kg
MODEL	I-IBBF4M2



TOOL SHELF

- Safer organized clutter free work area, installs at any rung height
- Installs facing inside or outside, no tools installation

DIMENSIONS (W x D x H)	76.8 X 50.8 X 6.7 cm
WEIGHT	2.5 kg
MODEL	I-CISTR

ADD-ON STORAGE SHELF



- Heavy-duty steel construction for durability and long service life
- Easy, tool-free installation and removal

DIMENSIONS (W x D x H)	188.6 X 64.8 X 5 cm
WEIGHT	12.5 kg
LOAD CAPACITY	90 kg
MODEL	I-CISSUM2

BAKER 6'

SCAFFOLD FOR DIY

- Perfect for home project and renovation
- Height adjustment every 5 cm



DIMENSIONS (W x D x H)	189.9 X 75.6 X 181.6 cm
WEIGHT	49.5 kg
LOAD CAPACITY	500 kg. Combined weight of user + materials
WORKING HEIGHTS	68.6 to 185 cm
REACH	3.83 m
CASTERS	13 cm double locking heavy-duty
MODEL	I-CISCM2

MULTI-FUNCTION WORKBENCH.

5 IN 1

- Miter saw stand
- Work bench
- Utility cart
- Storage rack
- Work platform



DIMENSIONS (W x D x H)	143.5 X 74.30 X 95.3 cm
WEIGHT	45.1 kg
LOAD CAPACITY	227 kg. Combined weight of user + materials
WORKING HEIGHTS	49.5 to 94.5 cm
REACH	3 m
CASTERS	13 cm double locking heavy-duty
MODEL	I-SB3MM2

JOBSITE™ SERIES 6'

STEEL UTILITY SCAFFOLD

- Multi-level working area foldable unit
- Folds for compact storage
- Quick and easy setup



DIMENSIONS (W x D x H)	190.5 X 77.5 X 198.8 cm
WEIGHT	61.5 kg
LOAD CAPACITY	385 kg. Combined weight of user + materials
WORKING HEIGHTS	33 - 63.5 - 94
REACH	3 m
CASTERS	13 cm double locking heavy-duty
MODEL	I-IRCM2

ALU™ SERIES 6'

ALUMINUM MOBILE SCAFFOLD

- Light aluminum foldable unit
- Folds for compact storage
- Quick and easy setup



DIMENSIONS (W x D x H)	143.5 X 73.7 X 182.9 cm
WEIGHT	27 kg
LOAD CAPACITY	318 kg. Combined weight of user + materials
WORKING HEIGHTS	30 - 60 - 90
REACH	3 m
CASTERS	13 cm double locking heavy-duty
MODEL	I-CAIRCM2

JOBSITE™ SERIES 5'

MINI MOBILE SCAFFOLD

- Integrated outriggers
- Tool shelf
- Safety rail to hold on to, for extra stability
- Folds for compact storage
- Quick and easy setup



DIMENSIONS (W x D x H)	128.3 X 78.7 X 194.3 cm
WEIGHT	35 kg
LOAD CAPACITY	408 kg. Combined weight of user + materials
WORKING HEIGHTS	29 - 64 - 93 cm
REACH	3 m
CASTERS	13 cm double locking heavy-duty
MODEL	I-IMISM2

JOBSITE™ SERIES 4'

MINI MOBILE SCAFFOLD

- Tool shelf
- Safety rail to hold on to, for extra stability
- Folds for compact storage
- Quick and easy setup



DIMENSIONS (W x D x H)	125.7 X 57.2 X 146.7 cm
WEIGHT	26.8 kg
LOAD CAPACITY	227 kg. Combined weight of user + materials
WORKING HEIGHTS	25 - 55 - 84 cm
REACH	2.75 m
CASTERS	10 cm double locking heavy-duty
MODEL	I-IMCNTM2

DRYWALL PRODUCTS

BuildMan^{Grade} DRYWALL STILTS

- One piece rubber sole
- Adjustable heights
- Padded comfort straps




46 UP TO 76 cm DRYWAL STILTS

DIMENSIONS (W x D x H)	31.8 X 15.2 X 96.5 cm
WEIGHT	3.2 kg (1 stilt)
LOAD CAPACITY	102 kg
ADJUSTABLE HEIGHTS	46 up to 76 cm. 5 cm increment adjustable heights.
MAXIMUM REACH	2.82 m
MATERIAL	Anodized aluminum
MODEL	I-BMDS1830

61 UP TO 100 cm DRYWAL STILTS

DIMENSIONS (W x D x H)	31.8 X 15.2 X 111.8 cm
WEIGHT	3.7 kg (1 stilt)
LOAD CAPACITY	102 kg
ADJUSTABLE HEIGHTS	61 up to 100 cm. 5 cm increment adjustable heights.
MAXIMUM REACH	3.5 m
MATERIAL	Anodized aluminum
MODEL	I-BMDS2440

JawClaw[®] PANEL GRIPPER



- Helps workers transport heavy drywall sheets
- Improves handling efficiency

GRIPPER CLAMP	Adjusts to panel up to 2.54 cm
WEIGHT	0.88 kg
LOAD CAPACITY	90.7 kg
MATERIAL	Aircraft grade aluminum and abs polymer
MODEL	I-IJCM2

BuildMan^{Grade} H-CART MULTI-USES



- Multiple configurations for maximum versatility
- Removable handles with integrated storages

DIMENSIONS (W x D x H)	127 X 70.5 X 122.6 cm
PLATFORM DIMENSIONS	127 X 42 cm. Flat bed configuration: 127 x 70.5 cm
WEIGHT	45.8 kg
LOAD CAPACITY	1,361 Kg
MODEL	I-BMDHER31YGRM2

METALTECH[®]

Since 1960, Metaltech has been a trusted Canadian manufacturer delivering innovative scaffolding, ladders, and access solutions engineered to meet the highest standards of safety, quality, and performance.

WWW.METALTECH.CO

LUKAS.MATFIAK@METALTECHNA.COM

+421 902 777 801